


WHAT IS IT?

TruGreen Fusion Bamboo Natural is 100% MOSO Bamboo that is crushed and then infused with a dense VOC-free resin. The product is then cold-pressed for optimum stability. MOSO Bamboo is the highest quality bamboo available for flooring. GreenWood MOSO Bamboo is harvested from the exclusive Anji Mountain Region of China and carefully selected at the peak of maturity between 5 to 6 years. The core of this product is GreenWood's unique TruGreen Advantage core. This core is 100% engineered MOSO bamboo in a cross-fillet format with special "thread" that intertwines each individual fillet. This "thread" allows for slight expansion and contraction in the core as well as increased precision in the manufacturing process. Overall, the TruGreen core construction provides the most stable platform on the market while still maintaining its status as 100% Rapidly Renewable Resource.

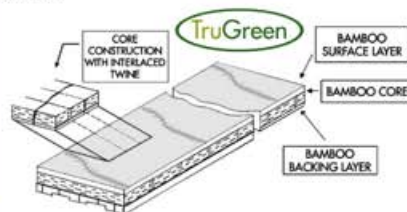

NATURAL

TruGreen
Fusion Bamboo

PRODUCT SPECS


THICKNESS 1/2"
WIDTH..... 5 5/8"
LENGTH 72"
WEAR LAYER 4.0mm
EDGE..... Micro Bevel
CORE..... TruGreen Engineered Bamboo Core

FINISH

Kluppp Miraphen Aluminum Oxide with Anti-Scratch Top Coat

INSTALLATION

Glue, Float or Staple/Nail



COLOR VARIATION

Natural Fusion Bamboo features slight to moderate color variation

GRAIN VARIATION

Natural Fusion Bamboo features moderate grain variation

COLOR CHANGE

Natural Fusion Bamboo will experience slight to moderate color change turning a rich honey color with time and exposure to sunlight

HARDNESS

3270 PSI

WARRANTY

Lifetime Structural
30 Year Residential Finish
5 Year Commercial Finish



*Environmentally Responsible,
 Quality Conscience,
 Fashion Inspired,
 ...GreenWood Products*

ENVIRONMENTAL INFORMATION

LEED® CREDITS

MR 6: Rapidly Renewable Materials

GreenWood Fusion Bamboo products qualify as MR6 (Rapidly Renewable Materials) as they are made with 100% MOSO bamboo, a rapidly renewable resource.

EQ 4.4: Low-Emitting Materials

GreenWood Fusion Bamboo products are manufactured with LEED EQ 4.4-compliant adhesive.

ENVIRONMENTAL IMPACT

Adhesives used in manufacturing of GreenWood products have Zero Added Urea Formaldehyde and comply with standards set by U.S. OSHA, European E0 and CARB (California Air Resource Board) Phase 1 & 2. GreenWood Fusion Bamboo products also feature high quality VOC-free resins and finishes.

GREENWOOD PRODUCTS COMPANY

Toll Free (866) 593-4454 :: Email info@GreenWoodFlooring.com
 www.GreenWoodFlooring.com

