




SAFARI

TruGreen
Fusion Bamboo

GREENWOOD PRODUCTS COMPANY

WHAT IS IT?

TruGreen Fusion Bamboo Safari is a unique composition of "flash dyed" strands of MOSO bamboo. The bamboo is crushed and the outside edges of the strands are hand dyed. The strands are then infused with a dense VOC-free resin and cold-pressed for optimum stability. MOSO Bamboo is the highest quality bamboo available for flooring. GreenWood MOSO Bamboo is harvested from the exclusive Anji Mountain Region of China and carefully selected at the peak of maturity between 5 to 6 years. The core of this product is GreenWood's unique TruGreen Advantage core. This core is 100% engineered MOSO bamboo in a cross-fillet format with special "thread" that intertwines each individual fillet. This "thread" allows for slight expansion and contraction in the core as well as increased precision in the manufacturing process. Overall, the TruGreen core construction provides the most stable platform on the market while still maintaining its status as 100% Rapidly Renewable Resource.

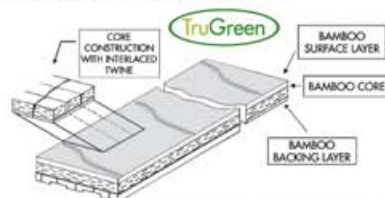

PRODUCT SPECS


THICKNESS 9/16"
WIDTH 3 3/4"
LENGTH 72 3/4"
WEAR LAYER 4.0mm
EDGE Micro Bevel
CORE TruGreen Engineered Bamboo Core

FINISH

Klump Miraphen Aluminum Oxide with Anti-Scratch Top Coat

INSTALLATION

Glue, Float or Staple/Nail

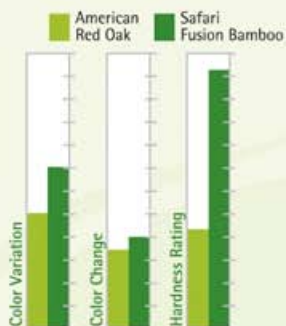

*Environmentally Responsible,
Quality Science,
Fashion Inspired,
...GreenWood Products*

COLOR VARIATION

Safari Fusion Bamboo features moderate color variation

GRAIN VARIATION

Safari Fusion Bamboo features moderate grain variation

COLOR CHANGE

Safari Fusion Bamboo will become slightly lighter over time

HARDNESS

3270 PSI

WARRANTY

Lifetime Structural
30 Year Residential Finish
5 Year Commercial Finish



ENVIRONMENTAL INFORMATION

LEED® CREDITS

MR 6: Rapidly Renewable Materials

GreenWood TruGreen Strand Woven Bamboo products qualify as MR 6 (Rapidly Renewable Materials) as they are made with 100% Moso bamboo, a rapidly renewable resource.

EQ 4.4: Low-Emitting Materials

GreenWood Fusion Bamboo products are manufactured with LEED EQ 4.4-compliant adhesive.

ENVIRONMENTAL IMPACT

Adhesives used in manufacturing of GreenWood products have Zero Added Urea Formaldehyde and comply with standards set by U.S. OSHA, European E0 and CARB (California Air Resource Board) Phase 1 & 2. GreenWood Fusion Bamboo products also feature high quality VOC-free resins and finishes.

GREENWOOD PRODUCTS COMPANY

Toll Free (866) 593-4454 :: Email info@GreenWoodFlooring.com
 www.GreenWoodFlooring.com

